


Adaptador para brida (flange adapter) PE-4710/PE100, certificaciones: NSF/ANSI 61; cumple con los requisitos: AWWA C906 (a partir de 4"); ASTM D2513, ASTM D3261.

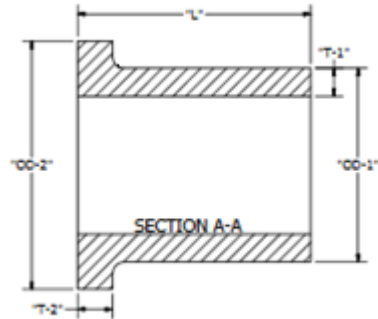

DIMENSIONES					RD-11
Diámetro	OD-1	OD-2	L	T-1	T-2
3/4"	1.050	1.772	3.464	0.118	0.276
1"	1.315	2.283	3.386	0.118	0.354
1 1/4"	1.660	2.677	3.504	0.118	0.394
1 1/2"	1.900	3.071	3.858	1.457	0.433
2"	2.375	4.000	6.000	0.216	0.598
3"	3.500	5.000	6.000	0.318	0.598
4"	4.500	6.598	6.800	0.409	0.800
6"	6.625	8.500	8.000	0.602	0.799
8"	8.625	10.598	9.000	0.784	1.000
10"	10.750	12.799	10.750	0.977	1.299
12"	12.750	15.252	11.000	1.159	1.540
14"	14.000	17.500	11.000	1.273	1.701
16"	16.000	20.000	12.000	1.455	1.902
18"	18.000	21.098	12.000	1.636	2.100
20"	20.000	23.500	12.000	1.818	2.300
22"	22.000	25.600	12.000	2.000	2.500
24"	24.000	27.900	14.000	2.182	2.900
26"	26.000	29.750	14.000	2.364	2.955
28"	28.000	32.000	14.000	2.545	3.182
30"	30.000	34.000	14.000	2.727	3.409
32"	32.000	36.125	14.000	2.909	3.636
34"	34.000	38.125	14.000	3.091	3.864
36"	36.000	40.500	14.000	3.273	4.091