


Transición PEAD-Acero con extremo soldable, fabricados con Acero A36 y PE4710 cumple con ASTM 3035 y ASTM 2513

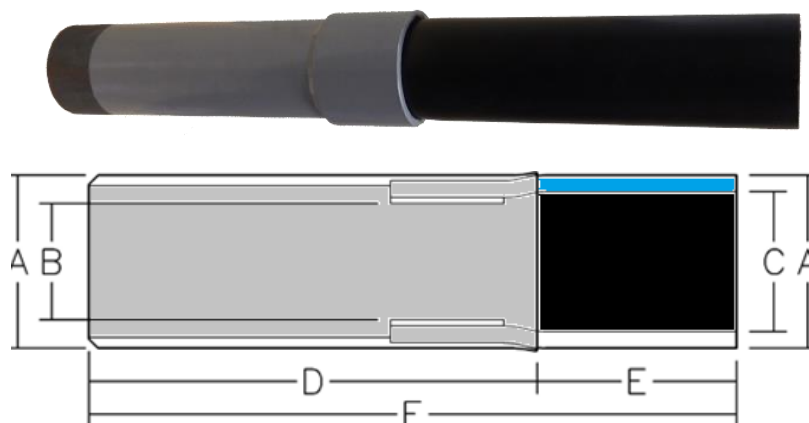

DIMENSIONES (RD 11)							
Diámetro	Diam. Ext. Acero A	Diam. Int. PEAD B	Diam. Int. PEAD C	Diam. Ext. PEAD A	Largo Acero D	Largo PEAD E	Largo total F
1"	1.32	↗ 0.97	1.051	1.315	8.00	↗ 6.25	↗ 14.25
1 ¼"	1.66	↗ 1.23	1.340	1.660	10.00	↗ 6	↗ 16
1 ½"	1.90	↗ 1.39	1.533	1.900	10.00	↗ 6	↗ 16
2"	2.38	↗ 1.74	1.917	2.375	10.00	↗ 5.625	↗ 15.625
3"	3.50	↗ 2.6	2.826	3.500	12.00	↗ 5	↗ 17
4"	4.50	↗ 3.41	3.633	4.500	13.00	↗ 9	↗ 22
6"	6.63	↗ 5.0	5.349	6.625	17.00	↗ 8	↗ 25
8"	8.63	↗ 6.5	6.693	8.625	20.00	↗ 9	↗ 29
10"	10.75	↗ 8.2	8.679	10.750	26.00	↗ 9.5	↗ 35.5
12"	12.75	↗ 9.8	10.293	12.750	28.00	↗ 10.5	↗ 38.5

Dimensiones en pulgadas

Para otros diámetros y RD por favor contactar a Policonductos