


Transición PEAD-Acero con extremo rosca NPT macho uso hidráulico, fabricados con Acero A36 y PE4710 cumple con ASTM 3035 y ASTM 2513

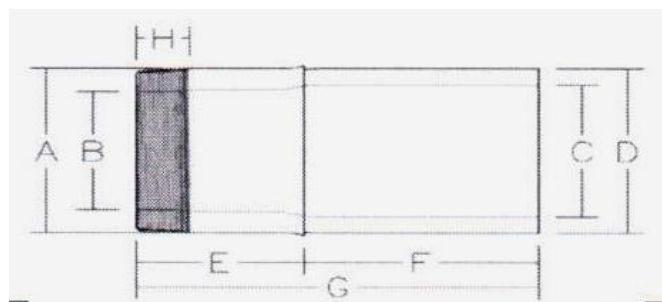

DIMENSIONES (RD 11)								
Diámetro	Diam. Ext. Acero A	Diam. Int. PEAD B	Diam. Int. PEAD C	Diam. Ext. PEAD D	Largo Acero E	Largo PEAD F	Largo total G	Largo total Rosca H
½"	1.00	¬0.625	0.67	0.840	1.6	6.4	8	0.64
¾"	1.25	¬0.79	0.84	1.050	1.8	6.2	8	0.70
1"	1.32	¬0.84	1.05	1.315	2.0	6.0	8	0.99
1 ¼"	1.66	¬1.06	1.34	1.660	2.6	5.4	8	1.01
1 ½"	1.90	¬1.28	1.53	1.900	2.6	5.4	8	1.03
2"	2.38	¬1.64	1.92	2.375	3.0	5.0	8	1.06
3"	3.50	¬2.42	2.83	3.500	4.0	4.0	8	1.26
4"	4.50	¬3.23	3.63	4.500	4.0	8.0	12	1.48
6"	6.63	¬4.8	5.35	6.625	5.0	8.0	13	1.56
8"	8.63	¬6.3	6.96	8.625	7.0	8.0	15	1.75
10"	10.75	¬7.9	8.68	10.750	8.0	8.0	16	1.85
12"	12.75	¬9.5	10.29	12.750	9.0	9.0	18	2.27

Dimensiones en pulgadas

Para otros diámetros y RD por favor contactar a Policonductos