


Cople de electrofusión para uso hidráulico y gas natural. Presiones 200-240 PSI a 73°F agua y 150 PSI a 73°gas. Aplicaciones en agua, fluidos y lodos. Diseñados para PE3608, PE4710 y PE100. Fabricados bajo las normas ASTM F-714, ASTM F-1055, ASTM D-3035, ASTM D-3035, AWWA C-901, AWWA C-906, DIN 16963, EN1555 y EN12201.

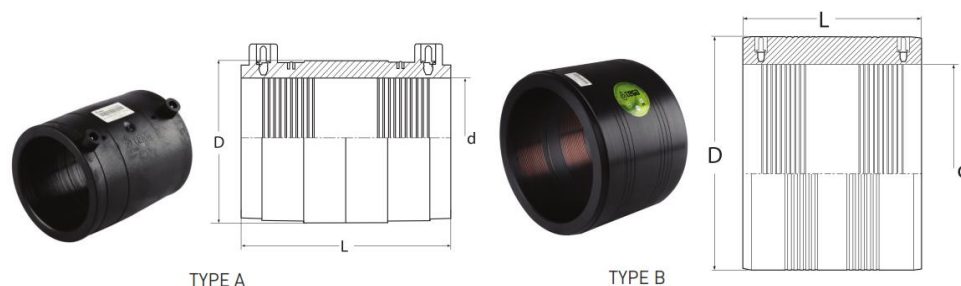

DIMENSIONES (RD 11)				
Diámetro	Diam. Int. Nominal d	D	L	Tipo
½"	0.84	1.300	2.36	A
¾"	1.05	1.610	2.80	A
1"	1.315	1.890	3.23	A
1 ¼"	1.66	2.170	3.39	A
1 ½"	1.9	2.640	3.86	A
2"	2.375	3.150	4.21	A
3"	3.500	4.530	5.91	A
4"	4.500	5.590	6.69	A
5"	5.563	7.090	6.73	A
6"	6.625	8.410	7.56	B
8"	8.625	10.750	7.87	B*
10"	10.750	13.390	8.66	B
12"	12.750	15.350	9.060	B**
14"	14	17.320	10.00	B
16"	16	19.290	11.81	B**
18"	18	21.570	12.60	B**
20"	20	24.210	14.41	B**
22"	22	27.170	15.75	B
24"	24	29.720	15.75	B
26"	26	32.280	16.54	B*
28"	28	34.650	17.52	B
30"	30	37.010	17.52	B
32"	32	38.980	18.50	B**
34"	34	42.130	18.90	B
36"	36	44.090	19.69	B

Dimensiones en Pulgadas

(*) 220 PSI; (**) 200 PSI