


Brida, (flange). Hierro Dúctil, ASTM 536, 65/45/12, cumple con los requisitos de la clase 150, se acopla con ANSI B16.5 y AWWA.

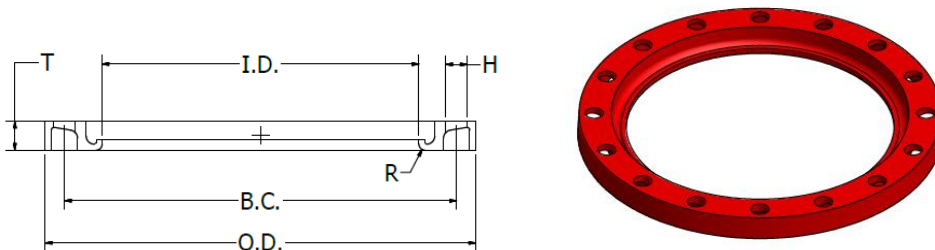

DIMENSIONES (RD 11)					
Diámetro	O.D.	T	I.D.	Cant. Pernos	Espesor del perno
3/4"	3.74	0.472	2.559	4	0.500
1"	4.251	0.551	2.952	4	0.500
1 1/4"	4.527	0.629	3.346	4	0.500
1 1/2"	5.511	0.708	3.397	4	0.500
2"	6.000	0.500	2.630	4	0.750
3"	7.500	0.530	3.750	4	0.750
4"	9.000	0.550	4.750	4	0.750
6"	11.00	0.630	6.880	8	0.875
8"	13.500	0.850	8.880	8	0.875
10"	16.000	0.980	11.000	12	1.000
12"	19.000	1.250	13.130	12	1.000
14"	21.000	1.380	14.380	12	1.125
16"	23.500	1.650	16.380	16	1.125
18"	25.000	1.670	18.380	16	1.250
20"	27.500	1.810	20.380	20	1.250
22"	29.500	2.000	22.380	20	1.375
24"	32.000	2.170	24.375	20	1.375
26"	34.250	2.380	26.380	24	1.375
28"	36.500	2.500	28.380	28	1.375
30"	38.750	2.600	30.380	28	1.375
32"	41.750	2.750	32.380	28	1.630
34"	43.750	2.930	34.380	32	1.630
36"	46.000	3.030	36.380	32	1.630

Dimensiones en pulgadas

Para otros diámetros y RD por favor contactar a Policonductos