


Tee reducida inyectada PE4710 / PE100, color negro fabricado bajo requerimientos AWWA ASTM-D2513 Y ASTM-D3261 diseñados para usarse en gas, agua potable, minería e industria.

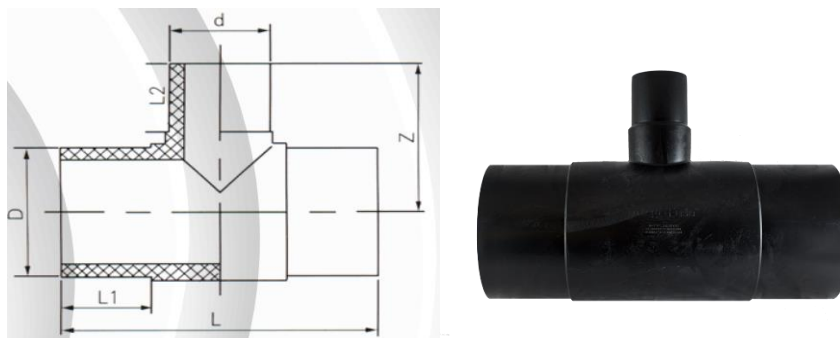

DIMENSIONES (RD 11)						
Diámetro	L	D	d	L1	L2	Z
3" X 2"	11.80	3.50	2.38	3.62	2.48	5.90
4" X 2"	13.78	4.50	2.38	3.94	2.48	6.89
4" X 3"	13.78	4.50	3.50	3.94	3.62	6.89
6" X 2"	18.10	6.63	2.38	4.72	2.48	9.06
6" X 3"	18.10	6.63	3.50	4.72	3.62	9.06
6" X 4"	18.10	6.63	4.50	4.72	3.94	9.06
8" X 2"	23.60	8.63	2.38	5.71	2.48	11.80
8" X 3"	23.60	8.63	3.50	5.71	3.62	11.80
8" X 4"	23.60	8.63	4.50	5.71	3.94	11.80
8" X 6"	23.60	8.63	6.63	5.71	4.72	11.80
10" X 4"	27.40	10.75	4.50	6.30	3.94	13.78
10" X 6"	27.40	10.75	6.63	6.30	4.72	13.78
10" X 8"	27.40	10.75	8.63	6.30	5.71	13.78
12" X 6"	31.40	12.75	6.63	7.48	4.72	15.95
12" X 8"	31.40	12.75	8.63	7.48	5.71	15.95
12" X 10"	31.40	12.75	10.75	7.48	6.30	15.95

Dimensiones en pulgadas

Para otros diámetros y RD por favor contactar a Policonductos